




Furtun acetilena instalatii sudura/taiere

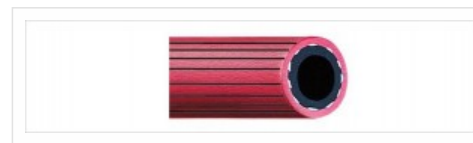

Furtun acetilena conform EN559 pentru instalatii sudura si taiere.

Norma: EN 559

Presiune de lucru: 20 bar

Presiune de spargere: 60 bar

Material interior: cauciuc sintetic negru, neted

Material exterior: Cauciuc sintetic rosu, striat

∅ Inner mm	Wall mm	∅ Outer mm	Length mtr	Art-No
6	3,5	13	50	3255 006000
8	3,5	15	50	3255 008000
9	3,5	16	50	3255 009000

Support tehnic live

Support tehnic 24/24

Produse

Cilindri pneumatice
Distribuitoare pneumatice
Fitinguri
Furtunuri pneumatice
Unitati de preparare aer
Actuatori
Scule si unelte pneumatice
Pistoale aer

Despre noi

Compania
Parteneri
Contact

Contact rapid

Tel./Fax: (+4) 031.437.01.40

E-mail: office@atsol.ro



Unavailable

This map is no longer available because it was moved to the trash. Please contact owner to restore access.

© 2017 Air Tech Solutions . All rights reserved.

[Home](#) | [Catalog](#) | [Parteneri](#) | [Compania](#) | [Unitati de preparare aer](#) | [Cilindri pneumatice](#) | [Furtunuri pneumatice](#) | [Scule si unelte pneumatice](#) | [Cine suntem](#)
| [Download Catalog Pneumatice 2015](#) | [Contact](#)