




J&M Model 3060 Top Drive Auger

The Worlds Largest Provider of
Foundation Construction Equipment

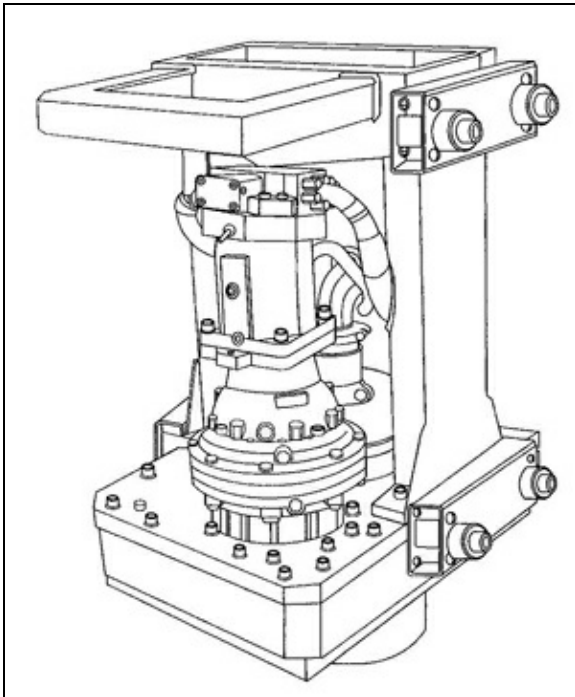

| Specifications | | Standard | Metric |
|--------------------------|-----------------|---------------------------|--------------------------|
| Low Speed High Torque | Torque | ft-lbs per 1000 psi | kgm per 69 bar |
| | Max Pressure | psi | bar |
| | Rotation Speed | 0 rpm | |
| | Max Flow | 0 gpm @ 0 gal / rev | 0 lpm @ 0 lit / rev |
| | Max Horse Power | 0 hp | 0 kW |
| High Speed Low Torque | Torque | 6,667 ft-lbs per 1000 psi | 922 kgm per 69 bar |
| | Max Pressure | 4,500 psi | 310 bar |
| | Rotation Speed | 60 rpm | |
| | Max Flow | 168 gpm @ 2.24 gal / rev | 636 lpm @ 8.48 lit / rev |
| | Max Horse Power | 343 hp | 255.78 kW |
| Crowd Force | | 35,000 lbs | 15,876 kg |
| Suspension Weight | | 3,000 lbs | 1,361 kg |
| Length | | 38 in | 97 cm |
| Width (Lead Section) | | 26 in | 66 cm |
| Width (Overall) | | in | cm |
| Height | | 52 in | 132 cm |
| ID of Output Shaft | | 4 in | 10 cm |

| | | |
|---------------------------|------------------------|------|
| ID of Rotary Joint | 3 in | 8 cm |
| API Adapters | API 3 inch, API 4 inch | |
| Lead Adapters | 8 x 26, 8 x 32 | |

WWW.APEVIBRO.COM

(800) 248-8498

webmaster@apevibro.com



Specifications may vary due to site conditions, specific hammer conditions or product set up. Specifications may change without notice.
Consult the factory for details on any specific product (800) 248-8498.